


FLOATING SEAL



Seal Group / Floating Seal was developed as a seal for track rollers of construction machines and vehicles. This seal consists of the O-ring and the floating seal made of special cast iron, achieving simple design.

Floating Seal is installed not to contact with the shaft and keeps sealing performance by the tightening force and elastic distortion of the O-ring. Therefore, floating seal is most appropriate to seal sand and dirt, and is widely used for the undercarriage of bulldozers and excavators.

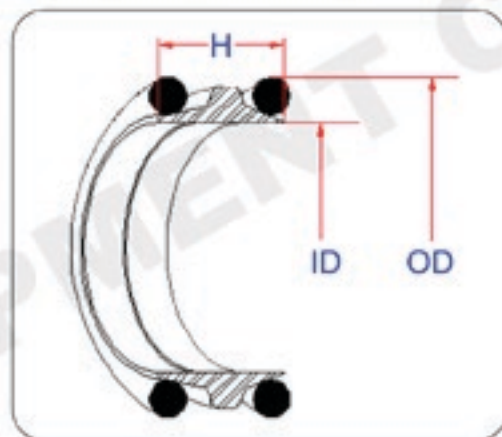

PRODUCT CODE	ID	OD	H
1M 8746	90.5	113.6	31.8
1M 8747	73	96.2	31.8
1M 8748	100	123.2	31.8
2M 2858	63.5	86.8	31.8
4K 6049	146	177	38
7M 481	163	196.4	38
4110358	48	68	25
4060255	64	84.6	25
4153731	102	127.2	32
4514259	250	284.6	44
4508193	110	133	32
58845-20500	69	89.7	12
101-27-00010 205-30-00050	98.5	125	30
110-30-00045	45	61.6	21
141-27-00010	239	274.2	40
130-27-00020	109	136.6	32
140-30-00040	58	79.4	27

PRODUCT CODE	ID	OD	H
141-30-00610	70	95.5	29
150-27-00015	115	141.8	31
150-27-00025	300	333	40
170-27-00010	130	155.6	32
170-30-00110 170-32-00210	80	105	29
20Y-30-00040	94	112	22
20Y-30-00041	92	114.6	22
20Y-30-00070	74	91	22
20Y-30-00100	104	122.2	22
TZR 020923442	209	243	42
7T 4080	55	68.5	18
180-27-00020	160	186.3	33

